REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/09/23

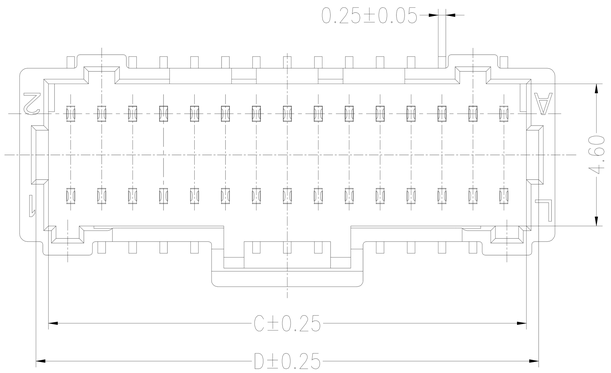

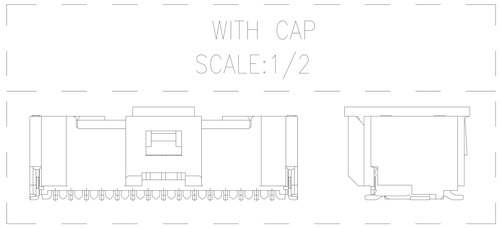

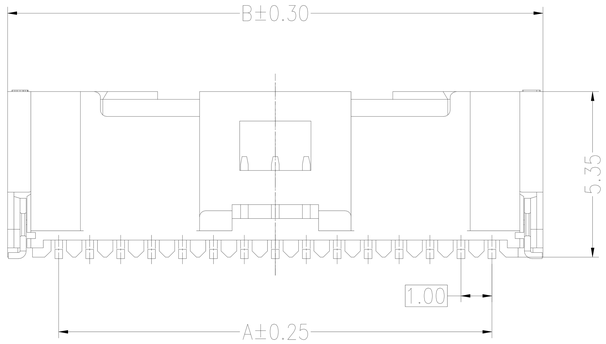

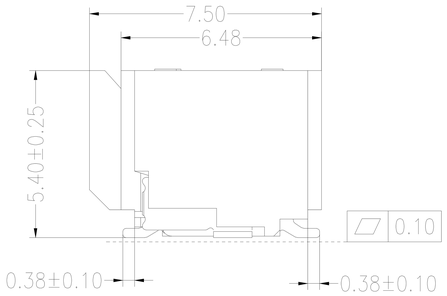

Specifications:
- Poles: 20 to 50
- Contact resistance:≤20mΩ
- Insulation resistance:≥100MΩ
- Rated voltage:50V AC DC
- Rated current:0.8A AC DC
- Withstand Voltage: 250V AC/minute
- Temperature Range:-25℃~ +85℃
- Housing:PA9T UL94V-0,Natural
- Contacts:PhosphorBronze/ Gold-plated
- Solder tabs:Brass/MATTE Sn-plated
- Cap: PA9T UL94V-0,Natural

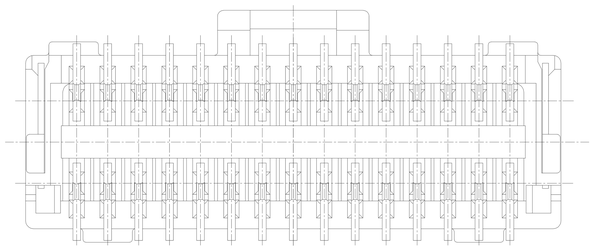

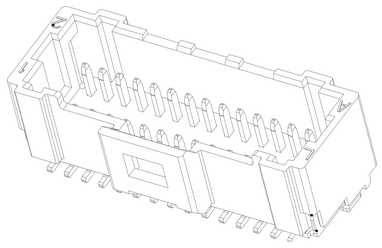

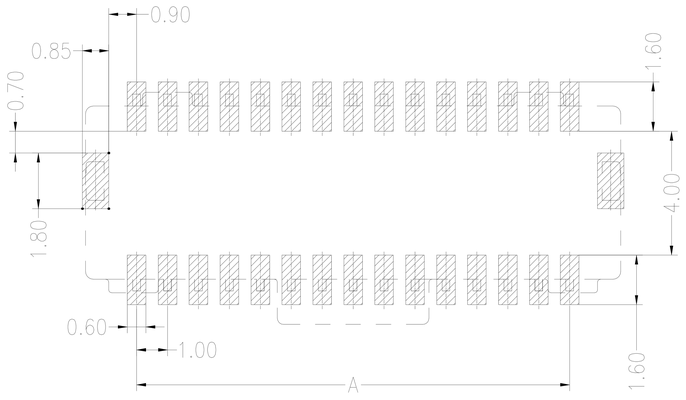

PCB LAYOUT(Tolerance:±0.05)

PIN.	DIM A	DIM B	DIM C	DIM D
2x10P	9.00	12.30	10.45	11.25
2x15P	14.00	17.30	15.45	16.25
2x20P	19.00	22.30	20.45	21.25
2x25P	24.00	27.30	25.45	26.25

紅焱電子有限公司

GENERAL	TOLERANCE	USE: CUSTOMER	TITLE: 1.00 Pitch Wafer 180° SMT
X. ±0.50	X. ±5°	APPD: Liuzhengling	PART NO.: A1008AWV-2XNP
X.X ±0.30	X.X ±2°	CHKD: Steven	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: FangSongLe	SCALE 1 : 1 / SHEET 1 / 1
	UNITS: mm		