REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	Steven	2019/09/18

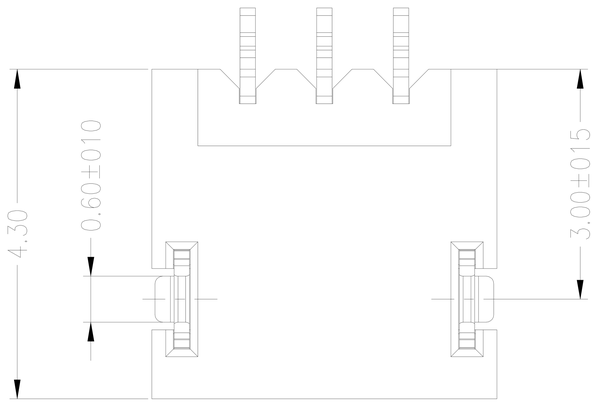

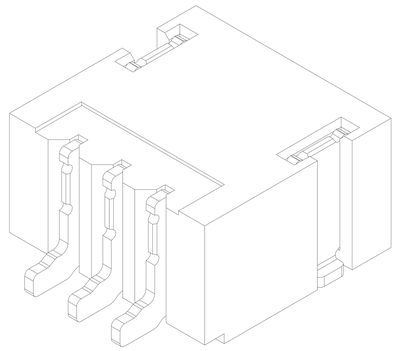

Specifications:
- Poles: 02 to 20
- Contact resistance:≤20mΩ
- Insulation resistance:≥100MΩ
- Rated voltage:125V AC DC
- Rated current:1.0A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range:-25℃～ +85℃
- Housing:PA6T UL94V-0,Natural
- Contacts:PhosphorBronze/Matte Sn-plated
- Solder Tabs:Brass/Matte Sn-plated

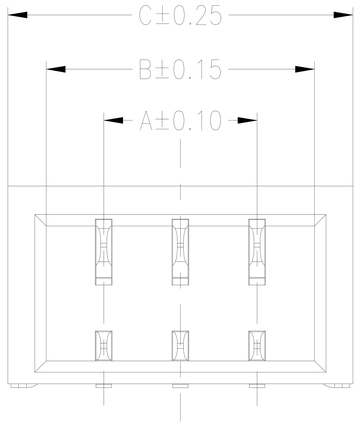

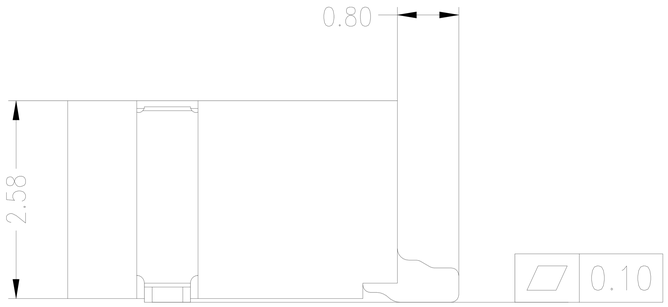

孔位 \ 尺寸	A	B	C	孔位 \ 尺寸	A	B	C
2P	1.00	2.50	3.50	12P	11.00	12.5	13.5
3P	2.00	3.50	4.50	13P	12.00	13.5	14.5
4P	3.00	4.50	5.50	14P	13.00	14.5	15.5
5P	4.00	5.50	6.50	15P	14.00	15.5	16.5
6P	5.00	6.50	7.50	16P	15.00	16.5	17.5
7P	6.00	7.50	8.50	17P	16.00	17.5	18.5
8P	7.00	8.50	9.50	18P	17.00	18.5	19.5
9P	8.00	9.50	10.5	19P	18.00	19.5	20.5
10P	9.00	10.50	11.5	20P	19.00	20.5	21.5
11P	10.00	11.50	12.5				

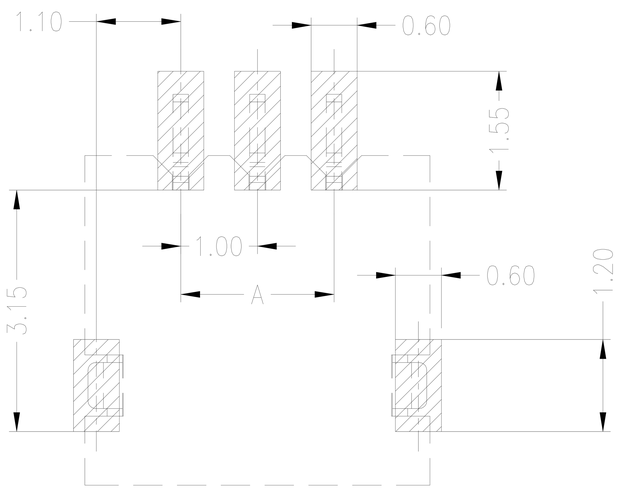

PCB LAYOUT(Tolerance:±0.05)

紅焱電子有限公司

GENERAL TOLERANCE			
X.	±0.50	X.	±5°
X.X	±0.30	X.X	±2°
X.XX	±0.20	X.XX	±1°
		UNITS:	mm

USE: CUSTOMER
APPD: Wangliang
CHKD: Liuzhengling
DR: Steven

TITLE: 1.0 Pitch Wafer 90° SMT
PART NO.: A1003AWR-NP
DWG NO.:
SCALE 1 : 1
SHEET 1 / 1