REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.11.11

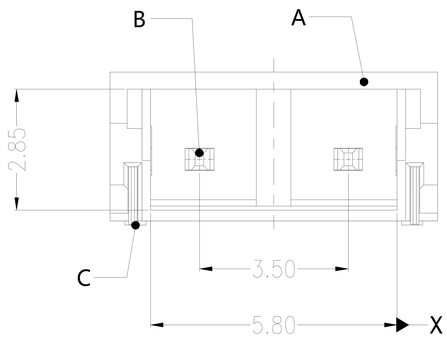

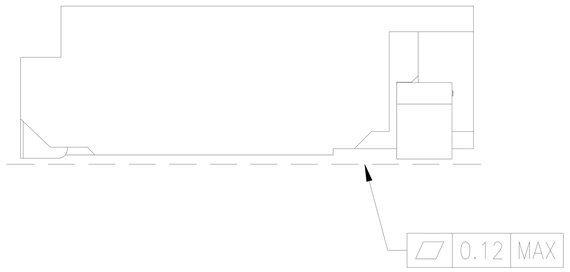

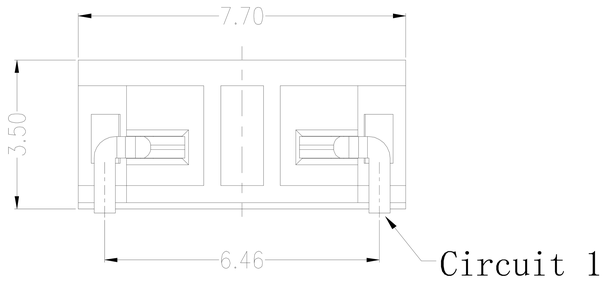

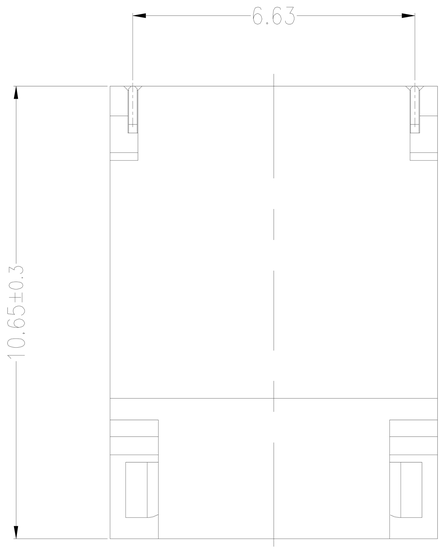

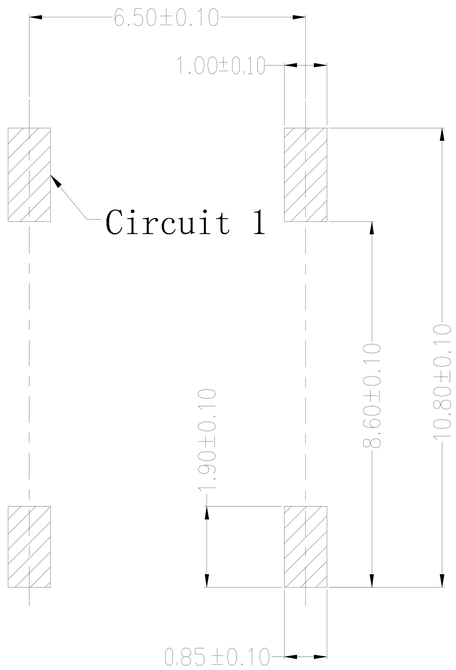

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

主要技术参数 Main Specifications

线　　数 (Poles): 02
接触电阻 (Contact resistance):≤20mΩ
绝缘电阻 (Insulation resistance):≥1000MΩ
额定电压 (Rated voltage):1400V AC DC
额定电流 (Rated current):1.0A AC DC
耐 电 压 (Withstand Voltage): 3800V AC/minute
温度范围 (Temperature Range):-25℃～ +105℃

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C	SOLDER TAB		2 PCS	PhosphorBronze	Sn-plated
B	CONTACT		2 PCS	PhosphorBronze	Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE

紅焱電子有限公司

TITLE: –
3.5mmPITCH 90°WAFER SMT TYPE

X.±0.5	X.±5°	USE: CUSTOMER	PART NO.: A3501AWR-2P
.X±0.3	.X±2°	APPD: 邵敬和	DWG NO.:
.XX±0.25	.XX±1°	CHKD: 田峰	
--	--	DR: 蒋建银	SCALE 1 : 1 / SHEET 1 / 1
	UNITS: mm		

REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.11.11

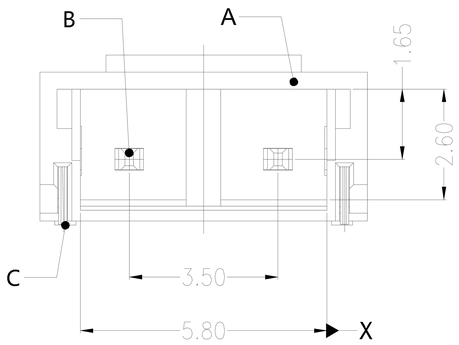

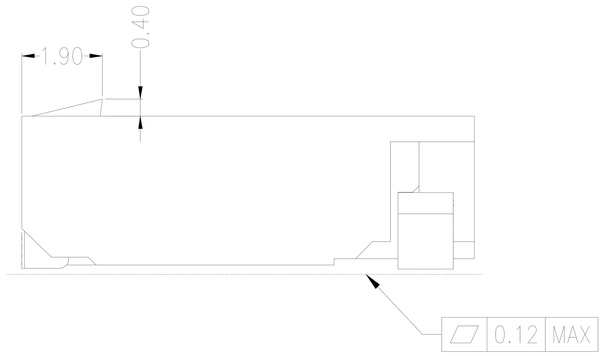

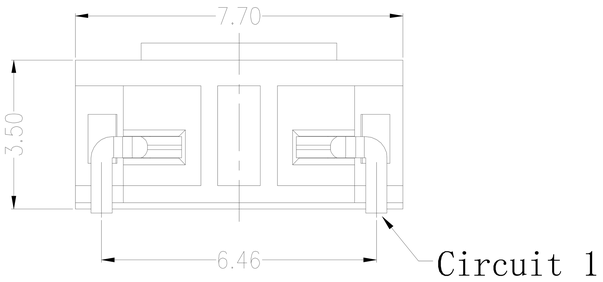

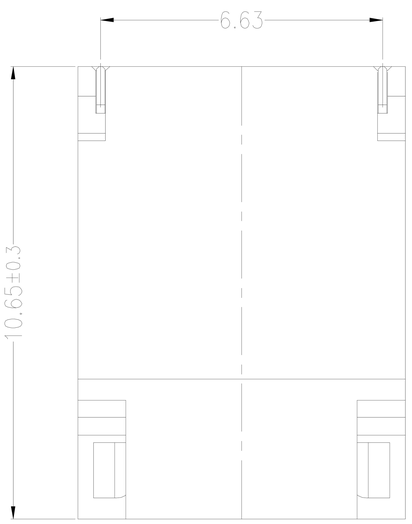

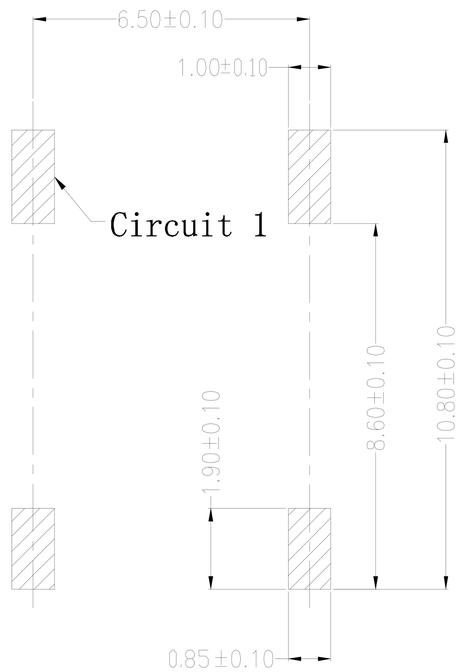

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

主要技术参数 Main Specifications

线　　数（Poles）: 02
接触电阻（Contact resistance）:≤10mΩ
绝缘电阻（Insulation resistance）:≥1000MΩ
额定电压（Rated voltage）:1400V AC DC
额定电流（Rated current）:1.0A AC DC
耐 电 压（Withstand Voltage）: 3800V AC/minute
温度范围（Temperature Range）:-25℃～ +105℃

ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
C	SOLDER TAB		2 PCS	PhosphorBronze	Sn-plated
B	CONTACT		2 PCS	PhosphorBronze	Sn-plated
A	PEDESTAL		1 PCS	LCP	UL 94V-0, COLOR:BEIGE

紅焱電子有限公司

TITLE: –
3.5mmPITCH 90°WAFER SMT TYPE

X.±0.5	X.±5°	USE: CUSTOMER	PART NO.: A3502AWR-2P
.X±0.3	.X±2°	APPD: 邵敬和	
.XX±0.25	.XX±1°	CHKD: 田峰	DWG NO.:
--	--		
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1 / SHEET 1 / 1